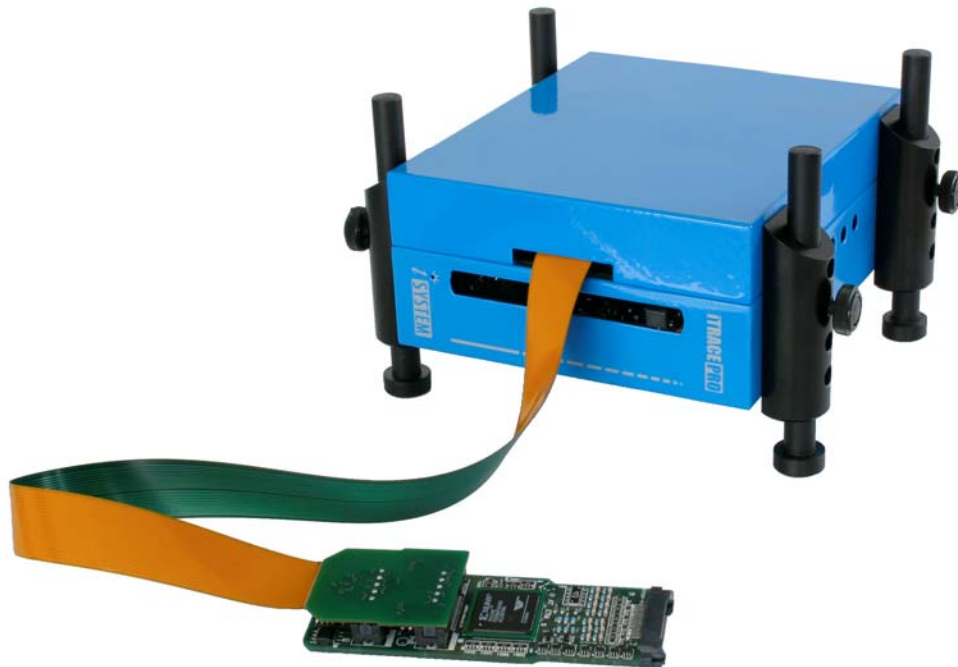

Hardware Reference

iTRACE PRO OCD Module (Nexus/ETM)

Ordering code	IC30336
---------------	---------



Thank you for purchasing this product from iSYSTEM. This product has been carefully crafted to satisfy your needs. Should any questions arise, do not hesitate to contact your local distributor or iSYSTEM directly. Our technical support personnel will be happy to answer all your technical support questions.

All information, including contact information, is available on our web site www.isystem.com. Feel free also to explore our alternative products.

iSYSTEM constantly yields for development and therefore certain pictures in this documentation may vary slightly from the actual product you received. The differences should be minor, but should you find more serious inconsistencies of the product with the documentation, please contact your local distributor for more information.

This document and all documents accompanying it are copyrighted by iSYSTEM and all rights are reserved. Duplication of these documents is allowed for personal use. For every other case a written consent from iSYSTEM is required.

Copyright © 2004 iSYSTEM, GmbH.
All rights reserved.
All trademarks are property of their respective owners.

Hardware Reference

iTRACE PRO OCD Module (Nexus/ETM)

The iTRACE PRO OCD Module can be used connected to iC3000(HS) or iC4000 Emulator through the ActivePRO interface.

The Flex cable of the module is connected to an iTRACE Probe.

A green LED is lit when the module is powered on.

PIN1 location on every component is also marked on the circuit board with a square block (PIN 1 pin is soldered a square block, other pins have a round pin).

AUX Inputs

The POD has a special interface for an additional ActivePRO AUX card (IC30338), which provides 16 AUX auxiliary inputs. Signals connected to these inputs are either sampled with the trace cycle or on the signal edge change. Inputs are divided into two identical blocks with 8 inputs each. Every block has an adjustable input threshold from 0 to 3V. Inputs are 5V tolerant. For more information see the hardware reference for the ActivePRO AUX Card.

Trigger Output

A trigger output is available on the module of SMA type and provides at least 1.5V on 50 Ohm load, active high. It can be asserted upon a trigger condition or a qualifier event, which can be configured in winIDEA.

Notes:

Notes: